

Dialog3G™ Register




Remote Small Concentrator

The Dialog 3G until is designed for outdoor application as well as for indoor uses. The Dialog 3G™ register is unified into the water meter. It can also be externally connected by the pulse output or by serial connection the Dialog 3G™ Universal™ unit. The Dialog 3G™ can be on-site programmed by a hand held PC (Laptop), Palm Reader or Pocket PC with RF accessories.

The Dialog 3G™ unit is set to transmit its reading sequentially each time according to its initial programmed set of time (Commonly, from 10 seconds and up to 30 seconds for the Walk-By, Drive-By and the Fixed Area systems). The meter data is transmitted directly to the concentrator or via the Repeaters, thus the user can actually get an on-line reading via the CITYMIND management system

The Dialog 3G™ unit for Water meters is self-powered by internal batteries and designed to operate continuously more than 10 years.

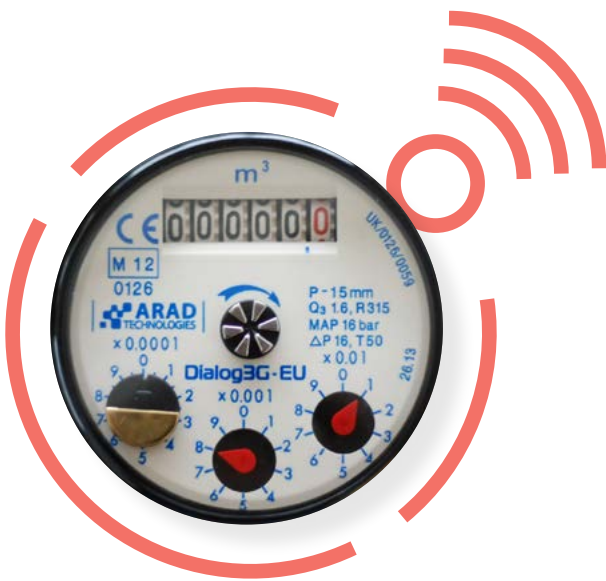

The main The Dialog 3G™ Meter programmable parameters

Meter User ID	A municipal Meter ID number of up to 5 digits
Transponder No	Meter's Dialog 3G™ transponder number of up to 12 digits
Reading	The transmitted Dialog 3G™ meter reading (up to 9 digits), the accumulated and the display readout are always equivalent.
Meter Type	Meter type such as water, gas or electricity
Count Factor	Meter count unit. It is a pre scale factor which is initially programmed into the Dialog 3G™ unit in order to get the standard measurement units for the system billing, management and calculation (Gallons or Cubic/ Mettic)
Alarms	Temper: A warning temper sign, in case of unauthorized meter tampering. CCW: Reverse consumption by the meter.
Gear Ratio	Water meter mechanical gear ratio parameter for the 3G Interpreter register types



Arad Ltd.
Dalia 1923900, Israel, Tel: 972-4-9897911, Fax: 972-4-9897960, www.arad.co.il

